


Mounting instruction – Hi-Fi-Series – HM

Specification:

Color: black / silver
Material: complete aluminium

Figure HM-01B:

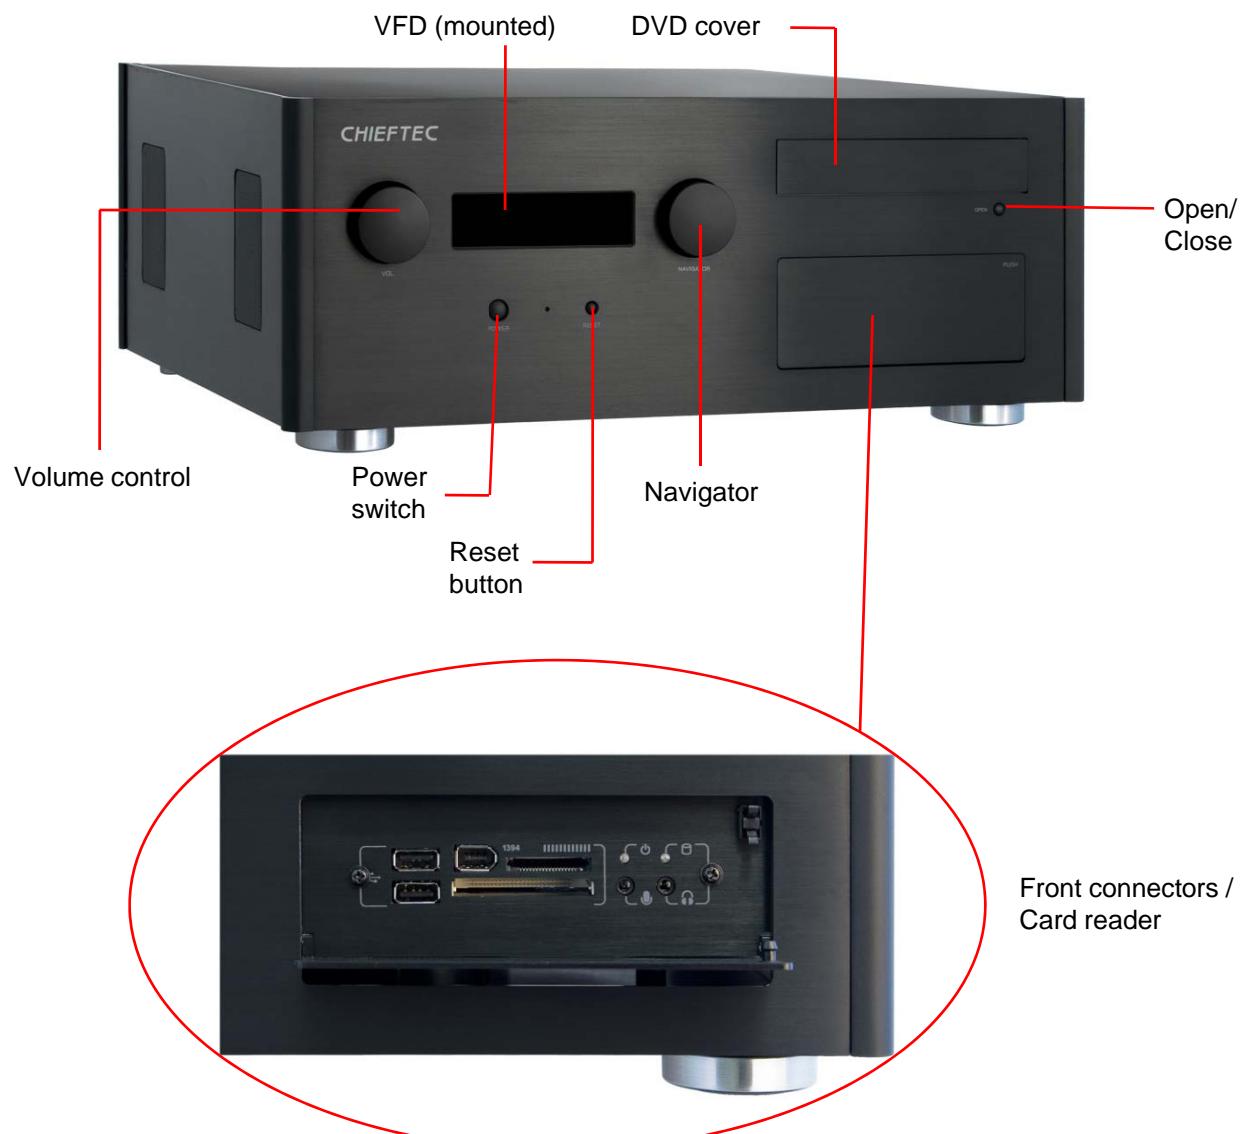

For more informations click onto www.chieftec.eu

Mounting instruction – Hi-Fi-Series – HM

1. How to open the case

Please loosen the four screws of the top cover.



2. Now easily remove the top cover.



3. Components, connectors and fittings are easy to reach now. Remove the three green bolts to take out the accessories.



For more informations click onto www.chieftec.eu

Mounting instruction – Hi-Fi-Series – HM

4. Installation of the I/O shield

Please mount the I/O shield on the backside of the case.



5. Installation of the mainboard

Find the right position for the mainboard.
You can fix the board with the provided screws and the necessary grommets.



6. Installation of the PSU

Place the PSU in the right position (as shown on the image) and fix it with four screws.



For more informations click onto www.chieftec.eu

Mounting instruction – Hi-Fi-Series – HM

7. Installation of 3,5“ HDD (only HM-01 / HM-02)

To install a 3,5“ HDD use the necessary screws (Img. 1) provided in the accessory box.



8. Press the red tagged levers and open the cage like shown on the image.



9. Now you can put the HDD upright in the HDD cage.



For more informations click onto www.chieftec.eu

Mounting instruction – Hi-Fi-Series – HM

- 10.** Now close the cage but be careful with the special HDD screws.



IMPORTANT! ATTENTION!!!

- 11. Installation of 3,5“ HDD (only HM-03)**

Please see step 7 first. In order to mount the HDD on the bottom of the cage, install the screws in the middle and rear holes of the HDD. Be careful when you slide in the HDD into the cage not to touch the nearby iMON module .



- 12.** Hold the HDD horizontally and slide it into the cage. Now switch the safety hook (yellow/red arrow) to fix the HDD.



For more informations click onto www.chieftec.eu

Mounting instruction – Hi-Fi-Series – HM

13. Installation of the 5,25“ device

To install a 5,25“ ODD use the necessary white screws (Img. 2) provided in the accessory box.



14. Put the ODD in the slide rails like shown on the image and fix it with the safety hook on the ODD cage. Now connect all components, e.g. motherboard, VGA card, fans etc. with the PSU.



15. Connect the front cables of the case

E.g. Power Switch, Power LED, Reset button, etc. according to the instruction of your motherboard manual.



16. Close the case

When everything is installed, screw the top cover back onto the case.

Have fun with your new CHIEFTEC case!

For more informations click onto www.chieftec.eu